

SPECIFICATIONS

Name	32 Inch Open Frame Touch Monitor
Model	OTL325-RPC04-UHPDA-S

LCD Panel Parameters

• Case/Bezel Color	Black Or White	
• Display Ratio	16:9	
• Backlight Type	LED	
• Active Display Area	698.40(H) x 392.85(V) mm	
• Native Resolution	1920 x 1080	
• Pixel Response Time(Typ)	8ms	
• Colors	16.7M	
• Luminance	450nits	
• Contrast Ratio (Typ)	3000:1	
• Viewing Angle(cr≥10)	Horizontal(left/right) Typ.	178°(89°/89°)
	Vertical(up/down) Typ.	178°(89°/89°)
• Input Video Format	RGB Analog / DVI Video	
• Backlight Lamp Life	50000 (Hrs To 1/2 Brightness)	

Touch Screen Parameters


• Touch Technology	Projected Capacitive Touch (P-Cap)
• Active Touch Area	700.3x394.9±0.5mm
• Glass Thickness	5.3±0.3mm
• Light Transmission	≥83%
• Surface Hardness	≥6H
• Touch Screen Interface	USB
• Touch Point	10

Touch Monitor Parameters

• Mounting Options	VESA : 200x200 mm
• Outline Dimensions	786.1x480.5x62.8mm
• Power Supply	100-240V AC
• On Screen Display (OSD)	Control(back): Power, Auto, Up, Down, Menu
• Power Consumption	MAX :60W
• Temperature Range	Operating: 0°C-40°C,storage: -20°C-60°C
• Humidity (Non Condensing)	Operating: 20%-80%,storage: 10%-90%
• Input Video Signal Connector	VGA,DVI ,DP,HDMI, Audio
• Operating Altitude	TBD
• Agency Approvals	CE/FCC
• Warranty	1 year

Appendix

TITLE: OTL325-RPC04

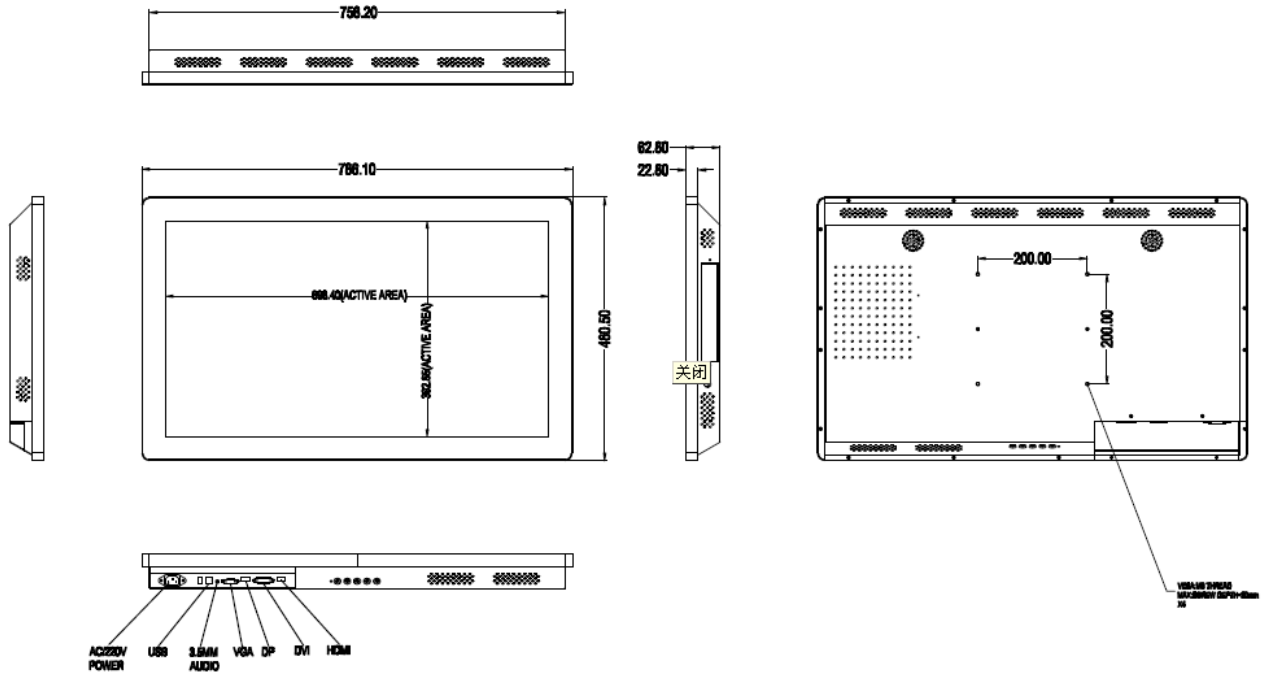

General Touch Co.Ltd. reserves the right to change or update the information contained in this document without notice, and also has the right to discontinue or limit the production and distribution of any products